



 MOBIUS

AUTOMATED CANNABIS PROCESSING

POST-HARVEST MADE EASY

Mobius simplifies the complexities of post-harvest production by offering the world's best processing equipment for the next generation of cannabis production facilities. Mobius was founded by industry veterans and built around world-class engineering with the mission of providing high-quality machines to commercial-scale cannabis operations.

Every part of the post-harvest process has been deconstructed and reimaged, resulting in streamlined equipment that is easy to use, scalable, and safe. Every machine features tool-free disassembly for reduced downtime through simple, fast cleanings and easy maintenance. All equipment is constructed with stainless steel and food-grade materials, so GMP-certified workflows are easily accommodated. Plant material that is processed by Mobius equipment rivals product processed by hand, maintaining better consistency, purity, and potency.

The Mobius Automation Suite will greatly reduce labor and operating costs while maximizing productivity and efficiency. Utilizing Mobius post-harvest processing equipment provides full control over the production process and seamless vertical integration as well as a faster harvest-to-sale process. See how each Mobius product can enhance your operation and increase profit and efficiency.

DESIGNED FOR CANNABIS

Mobius post-harvest equipment is designed from the ground up with the nature and characteristics of cannabis front of mind. Our equipment is built for industrial use and is easily cleaned by hand or pressure washer, so sticky resin and kief dust won't affect the machine's effectiveness. Mobius equipment is gentle on cannabis and ensures the highest trichome and terpene retention throughout the process.

DRIVEN BY TECHNOLOGY

Mobius prides itself on thoughtful design, in-house manufacturing, and white-glove customer service. Every aspect of the Mobius design process is informed by feedback gained from extensive interaction with real-world Mobius users. Our in-house R&D and manufacturing capabilities allow us to rapidly prototype and test new and improved designs so we can deliver them to our customers. The Mobius Cannabis Automation Suite moves and processes your crop flawlessly — with fewer chances for human error or contamination — giving you faster speed to market, better employee retention, and a solid foundation for growth.

TRUSTED BY INDUSTRY LEADERS



MEET THE FUTURE OF CANNABIS PROCESSING

END-TO-END AUTOMATION

Put profitability on autopilot with the Mobius suite of automated processing equipment. Cut your operating costs and increase product quality and shield yourself against regulatory threats with GMP-ready machines built to industrial standards.



MBX
BUCKER (P.4)



TD25 & TD15
DRY TRIMMERS (P.10)



MD48
DRY TRIMMER (P.12)



M210 & M60
MILLS (P.18)



M100
SOLVENTLESS (P.22)



MM65 & MM20
HASH WASHERS (P.26)



**COMMERCIAL
BUCKING**
80-150 lbs (36-68 kg) per hour.

**CSA SAFEGUARDING
COMPLIANT**
Fully guarded machine
ensures hands stay clear
from moving parts.



INTEGRATED STEM CHIPPER
Reduce waste 25X and slash
waste removal time and costs.

VARIABLE SPEED
Buck wet and dry
flower with ease.

MBX BUCKER

GENTLE ON FLOWER

The MBX Bucker gently removes the flower from the stalks while simultaneously chipping the stems into smaller pieces for reduced waste handling. With incredible pulling power on the plant stems, buck cannabis wet or dry while preserving precious trichomes.

INCREASED EFFICIENCY

Featuring seven feed holes for dual-operator productivity and custom die plates available, the MBX can process up to 150 lbs per hour, replacing the work and labor costs of 5-7 hand buckers. The machine has a stainless steel construction, making cleaning and maintenance easier and greatly reducing downtime.

FULL CONTROL

Ensure your top-quality flower stays intact with adjustable speed control, allowing you to match roller speeds with your strain and growing style. The large diameter rollers and powerful 1/2 HP motor provide uncompromising grip on stems and carefully remove the buds at any speed.

HIGH-QUALITY CONSTRUCTION

The MBX is made with stainless steel components and cast polyurethane rollers, so the machine is ready for integration into GMP facilities. The bucker is also fully guarded with a glove-friendly control panel for increased worker safety.

TECHNICAL SPECIFICATIONS

WET/DRY CAPABLE
Yes

CONSTRUCTION
304 Stainless Steel
6061 Aluminum
Cast Polyurethane
18-8 Stainless Steel

SPEED ADJUSTMENTS
1-11

NUMBER OF FEED HOLES
7

MAX HOLE DIAMETER
1/2" (1.27 cm)

INTEGRATED CHIPPER
Yes

STEM PULLER MOTOR
1/2 HP

CHIPPER MOTOR
3/4 HP

POWER REQUIREMENT
120 V, 15 A

**NUMBER OF CHIPPING
BLADES**
2

DISASSEMBLY TOOLS
5/32" Allen Key

FITS THROUGH 32 IN. DOOR
Yes

OVERALL DIMENSIONS
28" (71 cm) W
40" (101 cm) L
52" (132 cm) H

WEIGHT
275 lbs (125 kg)

WARRANTY
1 Year or 1,000 Hours



EFFICIENT TRIMMING

Wet: 60-120 lbs (27-54 kg) per hour.
Dry: 30-60 lbs (14-27 kg) per hour.

TANDEM-READY

Connect a second M108S in minutes. Double your production. No additional parts required.



TOOL-FREE DISASSEMBLY

Quickly replace dirty components with fresh ones to maximize production time.

GMP COMPLIANT

Stainless construction is washdown compatible.

M108S TRIMMER

CUTS LIKE SCISSORS

The surgical-grade stainless steel bed knives continuously flex against the rotating helical blades. This patented design ensures that the two cutting edges remain in constant contact, eliminating gaps and dead spots for a scissor-like trim.

50% INCREASED ACCESS TO BLADES

The patented AirThread Tension Tumbler provides the flower with over 50% more access to blades compared to traditional sheet-metal tumblers. This enables faster trim times, less surface area to collect resin, and a closer trim.

FASTER = FEWER LOSSES

Three independent helical blade cartridges are set side-by-side, giving flowers three cut-point opportunities with each pass of the tumbler. Product is trimmed faster and spends less time in the tumbler, minimizing the risk of impact damage.

OPTIMIZE EVERY ASPECT OF YOUR TRIMMING PROCESS

The Variable Function System gives users control to optimize their machine to suit any moisture content, strain type, or end-product requirements. Adjust tumbler speed, blade speed, suction, and tilt.

TECHNICAL SPECIFICATIONS

TRIMMING STYLE
Wet/Dry Throughput

CONSTRUCTION
304 Stainless Steel
Anodized Aluminum
Nitrided Blades

SPEED ADJUSTMENTS
1-11

NUMBER OF BLADES
3

VACUUM MOTOR
5 HP

TUMBLER MOTOR
1/8 HP

CUTTER MOTOR
3/4 HP

POWER OPTIONS
Three phase, 208 V, 22 A
Single phase, 240 V, 30 A

INTEGRATED TILT ANGLE
Yes

FITS THROUGH 32 IN. DOOR
Yes

TUMBLER DIMENSIONS
8" (20 cm) Dia. x 36" (91 cm) L

OVERALL DIMENSIONS
43" (109 cm) W
44" (110 cm) L
47" (119 cm) H

WEIGHT
500 lbs (227 kg)

WARRANTY
1 Year or 1,000 Hours





TRIMMING CAPACITY

TD15: Up to 10 lbs (5 kg) per hour.
TD25: Up to 24 lbs (11 kg) per hour.

PORTABLE DESIGN

The T-Line trimmers are designed to be portable, easy to use, and efficient.



TOOL-FREE DISASSEMBLY

Fully tool-free engineering allows for quick and easy cleanings.

GMP COMPLIANT

Constructed with stainless steel and food-grade materials.

TD15 & TD25 DRY TRIMMERS

DEDICATED DRY TRIMMING

The T-Line batch trimmers are made specifically for dry trimming applications, delivering premium flower and pure, high-quality trim that can be used for secondary processing for extracts and pre-rolls. Add an optional kief kit for optimized trimming and kief collection to double down on productivity.

PREMIUM FLOWER & PURE TRIM

The TD15 and TD25 are vacuum and lubricant-free, ensuring you produce clean flower and pure trim with each batch and harvest. The flower gently tumbles in the drum with our shear band technology, maintaining the integrity of the flower. The trimmer's precise cut delivers hand-trim results on a more efficient scale. All of the trim is collected and can be used for further processing. With a closed-loop system and no lubricants, the trim maintains its purity for the highest clarity kief and extracts.

REDUCE COSTS AND LABOR

Eliminate the hassles of staffing while reducing operating and labor costs and increasing trim consistency across every harvest. The trimmers' intelligent design achieves a seamless loading to trimming to unloading workflow. The efficiency boost from the T-Line dry trimmers allows for quicker and more consistent trimming than hand-trimming. Deliver better product on a more consistent schedule.

EFFICIENT WORKFLOW

The slotted drum in the T-Line trimmers is optimized to provide maximum exposure of the flower to the shear-band for efficient cutting and fast batch processing. Cleaning the machine after each run is also simple with the washdown-compatible construction.

TECHNICAL SPECIFICATIONS

TD15

TRIMMING STYLE
Dry Batch

CONSTRUCTION
Stainless Steel

SPEED ADJUSTMENTS
N/A

TOOL-LESS DISASSEMBLY
Yes

TUMBLER DIMENSIONS
9" (22 cm) Dia. x 15" (37 cm) L

OVERALL DIMENSIONS
16" (41 cm) W
13" (33 cm) L
23" (58 cm) H

WEIGHT
47 lbs (21 kg)

MOTOR
40 W

POWER REQUIREMENT
120 V, 1.5 A

WARRANTY
1 Year or 1,000 Hours

TD25

TRIMMING STYLE
Dry Batch

CONSTRUCTION
Stainless Steel

SPEED ADJUSTMENTS
1-11

TOOL-LESS DISASSEMBLY
Yes

TUMBLER DIMENSIONS
12" (30 cm) Dia. x 25" (65 cm) L

OVERALL DIMENSIONS
35" (90 cm) H
24" (62 cm) W
38" (96 cm) L

WEIGHT
106 lbs (48 kg)

MOTOR
40 W

POWER REQUIREMENT
120 V, 1.5 A

WARRANTY
1 Year or 1,000 Hours

GMP
READY

DRY TRIMMING CAPACITY
Up to 72 lbs (33 kg) per hour.

TOP-RATED SAFETY FEATURES

The MD48 boasts industry-leading safety features, including tote sensing and lid interlock to prevent unexpected start-ups and reduce the risk of injury.



AUTO-TENSIONING SYSTEM
Easily remove or reset the drum for simple tool-free cleaning without having to re-tension your machine.

GMP READY
Designed with the highest build quality and cleanliness in mind.

MD48 DRY TRIMMER

COMMERCIAL-SCALE TRIMMING

The MD48 is specifically designed for dry trimming processes, with a capacity of up to 72 lbs per hour. Achieve faster and easier loading & unloading, all quietly and efficiently controlled by the touchscreen interface. The proprietary auto-tensioning shear band technology eliminates the need for lubricants and vacuums, keeping your flower trichome-rich and ready for the premium flower market.

SAVABLE SETTINGS

The touchscreen HMI allows you to create your own recipes for different strains, keeping track of tumbler speeds, timers, and tilting settings, then saving them for future harvests.

OSCILLATING TECHNOLOGY

The system will pitch the unit back and forth, mixing the product more efficiently and speeding up the trimming process. The motorized pivot technology allows you to rotate the drum to load, run, and empty the machine ergonomically with the push of a button.

REDUCE OPERATING COSTS & LABOR

Eliminate the hassles of staffing while reducing operating and labor costs and increasing trim consistency across every harvest. Deliver better product on a more consistent schedule.

TECHNICAL SPECIFICATIONS

TRIMMING STYLE
Dry Batch

CONSTRUCTION
304 Stainless Steel

SHEAR BAND
Nylon 6/6

SPEED ADJUSTMENTS
1-11

POWER TILTING
Yes

TUMBLER OSCILLATION
Yes

HMI CONTROL
Yes

MOTOR
90 W

FITS THROUGH 32 IN. DOOR
Yes

TUMBLER DIMENSIONS
17" (43 cm) Dia. x 48" (122 cm) L

OVERALL DIMENSIONS
48" (122 cm) H
32" (81 cm) W
51" (130 cm) L

WEIGHT
310 lbs (141 kg)

POWER REQUIREMENT
120 V, 6 A

WARRANTY
1 Year or 1,000 Hours

100X FASTER

The M9 Sorter is 100x faster than hand sorting and 4x faster than the closest competitor, sorting 440 lbs (200 kg) per hour.

INDUSTRY-LEADING BELT LENGTH

78" (198 cm) total sorting distance with nine belts and unlimited sorting size configurations.



AUTONOMOUS OPERATION

Unlike screen sorters, the M9 works automatically, needing minimal employee oversight.

GMP COMPLIANT

The M9 has a stainless steel construction that is washdown compatible, ensuring it's ready for GMP facilities.

M9 SORTER

AUTOMATION INTEGRATION

Seamlessly integrate the M9 Sorter into your post-harvest workflow for autonomous operation. Connect Outfeed and Autofeed Conveyors from the M108S Trimmer for a consistent feed to the Sorter and a fully automated process. Reduce manual labor and downtime with automatic belt tensioning and integrated conveyor controls.

CUSTOM SORTING SIZES

The M9 features nine sorting belts and five user-adjustable sorting outputs. Operators can quickly adjust the spacers after each run to customize the desired bud sizes.

OPTIMIZE YOUR YIELD

Get the most out of your harvest by sorting out the larger, "top-shelf" flower from the smaller popcorn buds. Increase revenue by maintaining the premium on your colas while maximizing the value of your smaller buds for use in pre-rolls and extracts.

SMART TECHNOLOGY

Unlike manual screens or vibratory sorters, the M9 is gentle and precise with minimal agitation of the bud structure. The food-grade polyurethane belts reduce handling damage and preserve trichomes.

The M9 Sorter also has been designed with operator safety in mind. The sorter features LED status indicator lights and safety interlocks and meets the standards for CSA, EU, CE, and UL certifications.

TECHNICAL SPECIFICATIONS

WET/DRY CAPABLE
Yes

CONSTRUCTION
Anodized Aluminum
304 Stainless Steel

SPEED ADJUSTMENTS
1-11

NUMBER OF BELTS
9

BELT DIAMETER
5/16" (0.8 cm)

BELT DRIVE MOTOR
1/10 HP

POWER REQUIREMENT
120 V, 1.5 A

HMI CONTROL
Yes

FITS THROUGH 32 IN. DOOR
Yes

DIMENSIONS
30" (76 cm) W
88" (224 cm) L
47" (118 cm) H

WEIGHT
610 lbs (277 kg)

WARRANTY
1 Year or 1,000 Hours



EFFICIENT MILLING
M210: Up to 110 lbs (50 kg) per hour.
M60: Up to 20 lbs (9 kg) per hour.

CUSTOM GRIND SIZE
Seven mill screen options ranging from coarse to fine allow you to choose your particle size.



VERSATILE APPLICATION
The mills are perfect for grinding cannabis for use in pre-rolls, extracts, and fresh frozen applications.

TOOL-FREE DISASSEMBLY
Reduce downtime with fast, simple cleaning and easy maintenance.

STANDARD MILL SCREEN OPTIONS
● = recommended | ● = can be used | ● = not recommended

MILL SCREEN	HOLE SIZE	PRE-ROLLS	CO2 EXTRACTION	ETHANOL EXTRACTION	HYDROCARBON EXTRACTION	FRESH FROZEN
ULTRA FINE RASP	1/16" (1.6 mm)	●	●	●	●	●
FINE RASP	5/64" (2.0 mm)	●	●	●	●	●
MEDIUM MILLING	1/8" (3.2 mm)	●	●	●	●	●
COARSE MILLING	3/16" (4.7 mm)	●	●	●	●	●
COARSE BLENDING	1/4" (6.4 mm)	●	●	●	●	●
COARSE CHUNKING	1/2" (12.7 mm)	●	●	●	●	●
ULTRA COARSE CHUNKING	3/4" (19 mm)	●	●	●	●	●

M60 & M210 MILL

CONSISTENT GRIND
The stainless steel mills deliver the most consistent particle sizes for all cannabis applications. Variable speed operation and unlimited screen configurations give the operator full control over the grind.

PRESERVE POTENCY
With the mill’s interchangeable precision milling screens and low rotor speed, cannabis retains maximum levels of trichomes and terpenes.

SCALE YOUR OPERATION
Whether you are a small, medium, or commercial-sized cultivator, Mobius Mills are designed for any application. Integrate the M210 or M60 Mill seamlessly into your workflow and increase revenue by broadening your product offerings.

NO DOWNTIME
Keep production moving with continuous throughput and industrial-grade construction, perfect for facilities that demand efficiency and durability. The machine is easily cleaned in 10 minutes with a pressure washer or by hand, and workers are kept safe with CSA-compliant guarding.

TECHNICAL SPECIFICATIONS

M60
CONSTRUCTION Stainless Steel
SPEED ADJUSTMENTS 11
MOTOR 1/10 HP
POWER REQUIREMENT 120 V, 1.5 A
TOOL-LESS DISASSEMBLY Yes
FITS THROUGH 32 IN. DOOR Yes
MILLING CHAMBER 7¾" (20 cm) Dia. x 5" (13 cm) Depth
OVERALL DIMENSIONS 16" (41 cm) W 13" (33 cm) L 23" (58 cm) H
WEIGHT 60 lbs (27 kg)
WARRANTY 1 Year or 1,000 Hours

M210
CONSTRUCTION Stainless Steel
SPEED ADJUSTMENTS 11
MOTOR 1/2 HP
POWER REQUIREMENT 120 V, 6 A
TOOL-LESS DISASSEMBLY Yes
FITS THROUGH 32 IN. DOOR Yes
MILLING CHAMBER 18" (46 cm) Dia. x 10¾" (26 cm) Depth
OVERALL DIMENSIONS 28" (71 cm) W 28" (71 cm) L 52" (132 cm) H
WEIGHT 265 lbs (120 kg)
WARRANTY 1 Year or 1,000 Hours






**INFEEED
CONVEYOR**

Consistently feed
untrimmed flower into
the M108S Trimmer.



**OUTFEED
CONVEYOR**

Wide conveyor for easy
quality control on the
M108S Trimmer output.

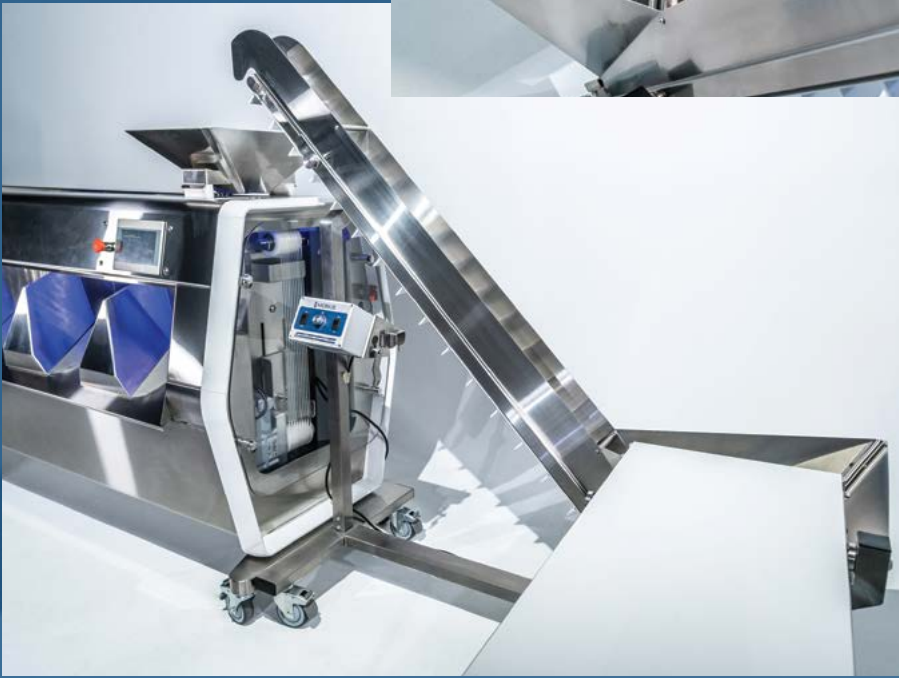

**AUTOFEED
CONVEYOR**

Continuously feed
the M9 Sorter from
the Outfeed Conveyor
or M108S for unmatched
production efficiency.

CONVEYORS

INFEEED

Cut labor expenses and increase the efficiency of your M108S Trimmer by up to 10% with the Mobius Infeed Conveyor. Utilizing the Infeed Conveyor reduces infeed gaps that can occur with manual feeding, and reduces quality control issues by enabling a visual inspection of material before it's fed into the trimmer.

OUTFEED

Create a continuous quality control system utilizing the Outfeed Conveyor attached to the M108S Trimmer. By positioning the cannabis conveyor and quality control staff on the outfeed of the trimmer, the trimmed flowers can be inspected immediately, reducing errors and streamlining your harvesting process.

AUTOFEED

Elevate your automation to a whole new level with the Mobius Autofeed Conveyor. This speed-adjustable conveyor raises your product for sorting with the Mobius M9 Sorter. The stainless-steel hopper can integrate with multiple trimmer lines for even greater efficiency.

CUSTOM CONVEYORS

Made-to-order conveyors that suit your facility's specific needs. Customize a conveyor based on processing capacity, dimensions, and intended use.

	INFEEED	OUTFEED	AUTOFEED
CONSTRUCTION	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
BELT MATERIAL	Fully-Encased Anti-Microbial Polyurethane	Fully-Encased Anti-Microbial Polyurethane	Fully-Encased Anti-Microbial Polyurethane
MOTOR	1/10 HP	1/10 HP	1/10 HP
SPEED RANGE	6–35 ft (2-10 m) per Min.	6–35 ft (2-10 m) per Min.	6–35 ft (2-10 m) per Min.
TOOL-LESS DISASSEMBLY	Yes	Yes	Yes
BELT DIMENSION	5" (13 cm) W 72" (183 cm) L	16" (41 cm) W 72" (183 cm) L	5" (13 cm) W 77" (196 cm) L
OVERALL DIMENSIONS	18" (46 cm) W 72" (183 cm) L 45" (114 cm) H	27" (69 cm) W 72" (183 cm) L 31" (79 cm) H	26" (66 cm) W 67" (170 cm) L 65" (165 cm) H
WEIGHT	87 lbs (40 kg)	120 lbs (54 kg)	180 lbs (82 kg)
POWER REQUIREMENT	120 V, 1.5 A	120 V, 1.5 A	120 V, 1.5 A
WARRANTY	1 Year or 1,000 Hours	1 Year or 1,000 Hours	1 Year or 1,000 Hours



MECHANICAL TILT

Automated mechanical tilt allows operators to bring the wash vessel to a fully horizontal position, making cleanout safe, easy, and sanitary.

HIGH-VOLUME WASHING

Achieve production volumes of around 50-75 lbs per batch.

5X FASTER COLLECTION

The free-rolling collection module houses the dewatering system and collection vessel, allowing for efficient and streamlined hash collection. Add-on extra collection modules to create a continuous workflow.

M100 SOLVENTLESS WASH SYSTEM

HASH WASHING AUTOMATION

Integrated sensors auto-detect water levels and temperature. Set recipes and run automatic wash sequences from the user-friendly touchscreen interface.

DEWATERING TECHNOLOGY

Advanced centrifugal design protects your trichomes during dewatering without using destructive vibratory force, speeding up your trichome filtering and collection.

INTEGRATED COOLING

The cooling vessel pre-chills 200 gallons of filtered water to approximately 32-34°F, the optimal temperature for hash washing. Triple-wall insulation ensures no condensation on the outside of the vessels, while internal glycol jackets actively cool the vessels throughout all stages of the wash, eliminating the need for ice.

MULTI-VESSEL SYSTEM

The Mobius M100 Wash System features multiple vessels for seamless commercial-scale operation. The system allows hash experts a streamlined workflow with a 200-gallon cooling vessel, a 100-gallon wash vessel, and a 100-gallon water recovery & recirculation vessel.

REDUCE COSTS

100-gallon water recovery and recirculation vessel allows you to reuse the water from each wash cycle to the next. Reduce downtime and minimize operating costs associated with cooling, filling, and emptying your wash vessels.

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Triple Wall 304 Stainless Steel

COOLING RESERVOIR

200 Gal

WASH VESSEL

100 Gal

RECOVERY VESSEL

100 Gal

CONTROL SYSTEM

Modbus Compatible HMI
User-Friendly Interface

MECHANICAL AUTOMATION

Water Agitation
Dewatering Centrifuge
Wash Vessel Tilt

COOLING TECHNOLOGY

Internal Glycol Jacket

MAX IMPELLER SPEED

Up To 500/Min

RECIRCULATION & TRANSFER PUMPS

3A Sanitary Pump
1/2 HP IP69K Washdown

AGITATION MOTOR

1 HP IP65 Continuous Duty
Washdown

DEWATERING MOTOR

1/4 HP IP65 Continuous Duty
Washdown

OVERALL DIMENSIONS

96" (2.4 m) W
126" (3.2 m) L
126" (3.2 m) H

POWER REQUIREMENT

240 V, 30 A

WARRANTY

1 Year or 1,000 Hours





GMP-READY EQUIPMENT

Maintain compliance in any GMP-certified facility with FDA-approved food-grade components.

TOUCH SCREEN INTERFACE

User-friendly HMI gives maximum control at the tip of your finger.

ULTRA-COOL TEMPERATURES

Reduce ice usage by up to 50% and maintain optimal temperatures with the built-in thermometer.

MM20 & MM65 HASH WASHERS

CUSTOM MODULAR SOLUTIONS

The MM series is built for solventless producers who demand quality and efficiency at any scale. The MM20 and MM65 are modular systems, allowing you to equip an existing workflow, build your own custom system, or choose an all-in-one complete hash washing machine.

AUTOMATIC WASHING CYCLES

Customize your wash sequence parameters to create unique washing cycles with the user-friendly interface. Easily save and replicate specific washes for customization and repeatability.

REDUCE LABOR AND BOOST EFFICIENCY

The MM series automates the bubble hash washing process, streamlining production and reducing manual labor. Save time and money with automatic wash sequences, and complete multiple washes in one day.

EASY CLEANING

Reduce downtime with the built-in tilt system for quick and easy cleaning. Every component is constructed with sanitary-welded stainless steel. Flush the full hash washing machine system with a cleaner for efficient, fast cleanings.

GENTLE ON TRICHOMES

The no-shear impeller imitates the effects of hand washing to create an effective but gentle vortex for optimal trichome separation. A perforated false bottom protects your trichomes during the wash process, allowing them to settle into a turbulence-free zone below the vortex.

TECHNICAL SPECIFICATIONS

MM20

CONSTRUCTION
304 Stainless Steel

IMPELLER MATERIAL
NSF/USDA-certified Delrin

CAPACITY
20 Gal

BAG SIZE COMPATIBILITY
5 Gal

IMPELLER SPEED
1-11

RECIPE BANKS
10

OVERALL DIMENSIONS
36" (91 cm) L
33" (84 cm) W
64" (163 cm) H

MOTOR
1/4 HP

POWER REQUIREMENT
120 V, 10 A

WARRANTY
1 Year or 1,000 Hours

MM65

CONSTRUCTION
304 Stainless Steel

IMPELLER MATERIAL
NSF/USDA-certified Delrin

CAPACITY
65 Gal

BAG SIZE COMPATIBILITY
10-20 Gal

IMPELLER SPEED
1-11

RECIPE BANKS
10

OVERALL DIMENSIONS
45" (114 cm) L
41" (104 cm) W
75" (191 cm) H

MOTOR
1/2 HP

POWER REQUIREMENT
120 V, 10 A

WARRANTY
1 Year or 1,000 Hours

**GMP
READY**

GMP CERTIFIED

GMP stands for Good Manufacturing Practices. In other words, it's a set of rules and procedures related to the handling, cleaning, quality assurance, and packaging processes in manufacturing facilities and the products they make. The application of GMP to the harvesting and production of cannabis means the consumer receives safe and consistent products.

All Mobius equipment is constructed with 100% stainless steel and food-grade materials. Easily disassembled in minutes and cleaned by hand or pressure washer, Mobius equipment is seamlessly integrated into GMP-compliant facilities. With the most stringent regulations for GMP and worker safety in mind, Mobius machines are robust and simple in design, enabling hassle-free operation.

- All plant-contact surfaces on Mobius equipment are smooth and made of non-toxic, corrosion-resistant, non-reactive materials, capable of withstanding repeated cleaning
- All plant-contact surfaces on Mobius equipment are accessible and/or removable for cleaning and can be effectively cleaned with non-toxic detergents or just water alone
- Mobius equipment, particularly the M108S Trimmer, does not have any hoses or hidden parts, which are exceptionally difficult to clean and have the potential to harbor microorganisms
- The M108S Trimmer is a semi-closed system that generates minimal airborne particulate because the system separating the trim from the flower is built into the machine
- SOPs for Mobius equipment are simple and straightforward, ensuring consistency

LEARN MORE ABOUT GMP

Visit mobiustrimmer.com/gmp-certified-cannabis-trimming/ to download *Cannabis & GMP: A Guide to GMP-Certified Post-Harvest Processing*.




AUTOMATION SIMPLIFIED

FREE WORKFLOW DESIGN

Connect with us and gain expert analysis of your existing workflow and how to optimize your production with Mobius Automation. An in-house Automation Specialist will review your information and identify configurations to reduce operating and labor costs while increasing efficiency.

NEED HELP CHOOSING WHAT EQUIPMENT WOULD SUIT YOUR OPERATION?

CONTACT US AT 1-866-874-6244 | INFO@MOBIUSTRIMMER.COM | [MOBIUSTRIMMER.COM](https://mobiustrimmer.com)

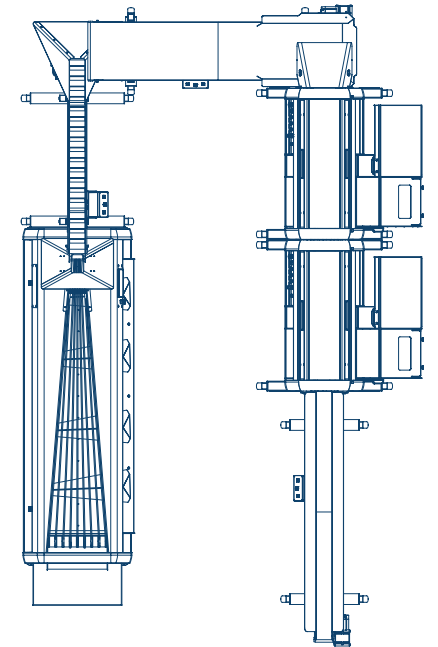

GMP CLEAN ASSURANCE

RECOMMENDED CLEANING PRODUCTS

GMP Solutions offers products specially formulated to safely and effectively remove resin, organics, greases and oils from cannabis processing equipment.

SHOP PRODUCTS AT [GMPSOLUTIONS.COM](https://gmpsolutions.com)



ADD MOBIUS TO YOUR TRIM ROOM.
CONTACT US FOR A CUSTOM QUOTE.



1-866-874-6244
INFO@MOBIUSTRIMMER.COM
MOBIUSTRIMMER.COM