

TUMBLER REMOVAL

Video instructions are available
online for your reference.



01



Lock the trimmer into place and open the lid.

02



Install the Spring Jack Tool, rotate the handles and valve dial into position and apply enough air to bottom out the Spring Pack.

03




This will relieve the tension on the tumbler.

04



Rotate the retaining ring on the outfeed end clockwise to unlock and then remove it.

05

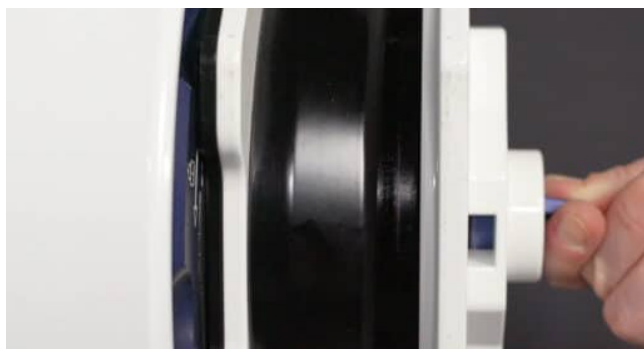

Release the pressure on the Spring Jack by rotating the valve dial and remove the tool from the lid.

06



Unlock and remove the other retaining ring. Slide the tumbler out of the lid.